

RP-MVS02H

2 Ports Video splitter with 250Mhz

The splitter enhance and duplicate video signals from a single source and direct it to 2 video outputs of monitors.

The splitter not only allows users to split the signal but also to extend the signal up to 50 meters in distance. Additionally, the splitter can be daisy chained to handle as many monitors as the installation requires.




Feature

- Supports VGA, SVGA, XGA,UXGA and Mulit-Sync monitors
- Supports 250 MHz video bandwidth
- DDC and DDC2 support at Port1
- Video input supports two power ways : USB Port connect PC or optional power adapter
- One video input with 2 video outputs, daisy-chainable
- High resolution: 1920 ×1440

Specification

Function	<ul style="list-style-type: none">• Video Splitter with 250MHz
Cable Distance	<ul style="list-style-type: none">• 50m Max. (Device to Monitor)
Signal Type	<ul style="list-style-type: none">• VGA, SVGA, XGAU, XGA, Multi sync
Video Input connectors	<ul style="list-style-type: none">• 1 * HDB-15 Male
Video Output connectors	<ul style="list-style-type: none">• 2 * HDB-15 Female
Max. Resolution	<ul style="list-style-type: none">• 1920 * 1440
Environment	<ul style="list-style-type: none">• Operating temperature : 0°C to 40°C
Certification	<ul style="list-style-type: none">• FCC, CE

Application

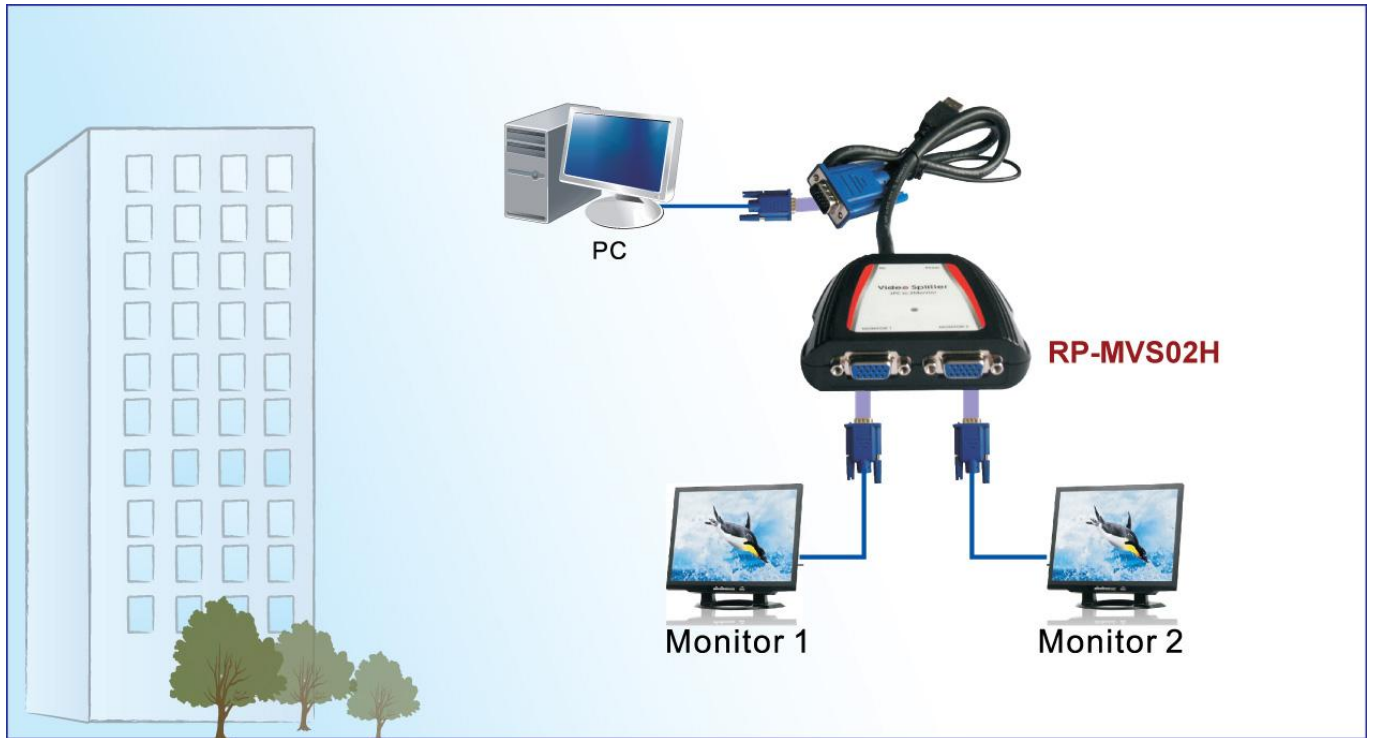

Ordering information

RP-MVS02H 2 Ports Video splitter with 250Mhz

REPOTEC CO., LTD.

3F, No.258, Lian Cheng Rd., Chung Ho City, Taipei Hsien 235, TAIWAN
TEL: 886-2-8227-1888 FAX: 886-2-8227-1818