

RP-PEG5T/4

5-P Gigabit Ethernet Switch, w/ 4-PoE

RP-PEG5T/4 provides 4 10/100/1000Mbps Power over Ethernet ports, plus one Uplink port. It complies with IEEE 802.3af standards and supplies up to 15.4 W per port , with a total



power budget of 62W. The switch automatically detects IEEE 802.3af compliant device connected and provides power and data over a RJ45 cable to these devices.

RP-PEG5T/4 features a solid metal cabinet for durability, and front panel LEDs for quick indication of connection speed and status.

It enables users to power a PoE IP Phones, security camera/network webcam situated in a remote area where power connection is not possible. And it's also perfect for powering a Wireless Access Point in a business environment. In short, it is an ideal solution for office and home users who utilize a combination of PoE and non-PoE enabled devices.


Features

- Comply with IEEE 802.3af PoE standard
- Powered Device(PD) Detection
- Support 15.4W maximum per PoE port
- MAC Address:1K
- Buffer Memory: 104KB Features
- Transmission Method: Store and Forward
- Backplane: 10Gbps

Specifications

Standards	• IEEE 802.3 10 BASE-T
	 IEEE 802.3u 100 BASE-TX
	 IEEE 802.3ab 1000Base-T
	IEEE 802.3af Power Over Ethernet
Interface	 4* 10/100/1000Mbps RJ-45 ports
	1* Uplink Port
MAC Address	• 2K
Buffer Memory	• 104KB
Transmission Method	Store and Forward
Backplane	10Gbps
Filtering/Forwarding Rates	 1000Mbps port – 1,488,000pps
	 100Mbps port - 148,800pps
	 10Mbps port - 14,880pps
Transmission Media	10BaseT Cat. 3, 4, 5 UTP/STP
	 100BaseTX Cat. 5 UTP/STP
	 1000BaseTX Cat. 5E/6/7 UTP/STP
PoE Specification	PD classification identify
	PoE over current protection
	PoE circuit sorting protection
	• PoE power on RJ-45 pin 1,2 for power + / pin 3,6 for power -
LED Indicators	Power, Uplink , LAN1~4 port , PoE 1~4 port
PoE Power Budget	15.4 W per PoE port
C C	Total Power for PoE 62W
Power Supply	External Power Adapter 100~240VAC, 50/60 Hz
Environment	Operating temperature : 0°C to 50°C
	 Operating Humidity:10% to 90% (Non-Condensing)
Dimension	• 120 * 90 * 28mm
Certification	FCC, CE

Application

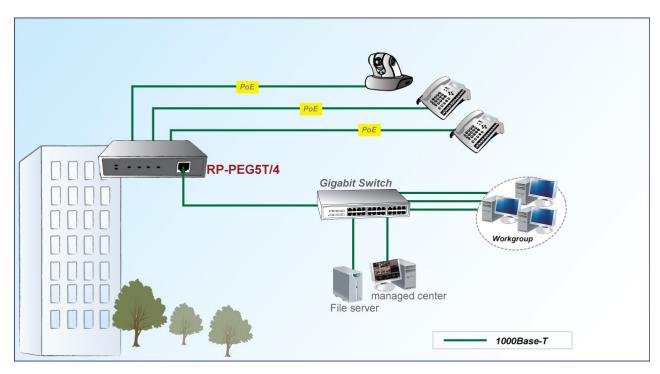

Ordering information

RP-PEG5T/4 5-P Gigabit Ethernet Switch, w/ 4-PoE

REPOTEC CO., LTD. 3F., No.258, Liancheng Rd., Zhonghe District., New Taipei City 235, Taiwan TEL: 886-2-8227-1888 FAX: 886-2-8227-1818