



RPT-3130TR

3000VA Line Interactive UPS, Rack / Tower Type


Feature

- Line Interactive Design
- User-friendly LCD Display
- Auto Restart when AC Recovery
- No Load Auto Shutdown (Dip Switch Set up)
- Buzzer Alarm Auto Reset (Dip Switch Set up)
- Tel/Modem/Fax/Internet Surge Suppression
- Provide Boost and Buck AVR to stabilize Input Voltage
- Provide Lightning, Surge Overload and Short Circuit protection
- Built-in CCCV Battery Charger and Battery Over Drain Protection
- Optional Bundles Software: Automatically save Your Valuable Files before Auto Shutdown
- Rack/Tower Design




Interface

Front Panel

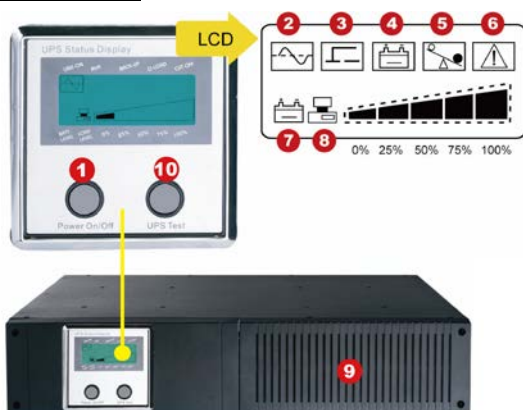

1. **Master Power Switch:** Turn on / off the UPS.
2. **Line-On:** AC Normal .
3. **AVR Protection LCD:** When AVR is working under protection mode, the light will turn on.
4. **Back-Up:** Battery in back-up
5. **Over Load:** If the UPS is overloaded, the light will turn on and the alarm will sound continuously.
6. **UPS Cut-Off:** Overload or Cut-off
7. **Battery Level:** A bar graph showing how much of the UPS battery is being used.
8. **Load Level:** A bar graph showing how much of the UPS power is being used.
9. **Hot swap battery**
10. **UPS Test Switch:** When UPS is working under AC mode, it also activates the UPS's self-test by press the bottom.

Rear Panel

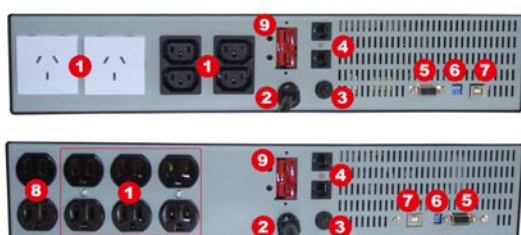

1. **Outlets**
2. **AC Input**
3. **AC Fuse**
4. **Tel/Modem/Fax/Internet Spike Protection port**
5. **Communication Interface Port**
6. **UPS Function Set up (1) No Load Auto Shutdown (2) DC Start (3) Buzzer Alarm Auto Reset**
7. **USB Port**
8. **Surge Protection Only**
9. **External Battery Connector (Optional)**

Specification

Model		RPT-3130TR
Capacity	VA	3000VA / 1800W
Input	Voltage	110/115/120VAC or 220/230/240VAC
	Range	(+/- 25%)
	Frequency	47-53Hz or 57-63Hz
Output	Voltage (Batt. Mode)	110/115/120VAC or 220/230/240VAC +/-10%
	Frequency	50Hz or 60Hz ±1Hz
	Waveform	Modified sine wave
	Transfer Time	Less than 6ms (typical)
	European type + IEC-320	2+4
	Nema 5-15R:Battery/Surge only	6/2
Battery	Battery Type	12V/9AH *4PCS
	Recharge Time	5 hours to 90% of full capacity
	Battery protection	Over discharge protection & Short circuit protection by fuse
	Advanced Battery Management	Yes
	Battery Back-up Time	It depends on connecting loads and external battery packs
Function	Display (LCD)	LCD indicator for AC normal, battery back-up, AVR protection, Overload and cut-off, Load and battery level
	Alarm	Buzzer on Back-up mode, Battery low, Overload
	Output Short Protection	AC fuse and Electronic circuit(Line mode); Electronic circuit(Back-up mode)
	Communication Port (USB)	Shutdown Software for Windows
	Modem/Phone/ Protection	RJ-11/RJ-45
	Lightning/Surge Protection	175Joules
	AVR(Auto Voltage Regulation)	Boost/Buck
	DC start Function	Yes
	Auto. Restart UPS	Yes
	Over/Under Voltage Protection	Yes
Environment	Safety Standard	CE(EN500911-1, EN62040-1-1)
	EMC standard	FCC Part 15 Class B, CE(EN50091-2, EN55011, EN61000-3-2, EN61000-3-3)
	Operating Temperature	32°F-104°F, at full load,
	Relative Humidity	0~90% relative humidity (non-condensing)
	Noise Level	Less than 40db (at 1 meter)
Physical	Dimension, D*W*H	W440 x H88 x D347
	Net weight	31kgs

Ordering information

RPT-3130TR 3000VA / 1800W Line Interactive UPS, w/ USB & DB9 port