



RP-WR5822

Wireless-ac Dual-Band 4-P Gigabit AP Router, 2T2R

The RP-WR5822 is the high speed and wide-Range Wi-Fi Router, complies with IEEE 802.11a/b/g/n/ac standard, dual band technology and Gigabit LAN and WAN, it provides speed up to 866Mbps in the 5GHz frequency band and 300Mbps in the 2.4GHz frequency band at the same time.

The 4 gigabit networking ports improve communication speed. With its superb speed transmission, user can connect the media player, gaming console, or other networking devices at blazing fast wired connection speeds. With enough bandwidth to handle high level activity on multiple devices, buffering videos guarantees extremely high throughput and excellent signal quality.

The RP-WR5822 supports up-to-date encryptions, such as WPE, WPA and WPA2. With WPS button for easy wireless security encryption, by just clicking the WPS button, the secure connection between the wireless AP and wireless client will be built immediately.



Feature


- Comply with IEEE 802.11a/b/g/n/ac dual band (2.4GHz & 5GHz) wireless technology capable of up to 300 + 866Mbps data rate
- Equipped with all gigabit RJ-45 ports ensure ultra fast data transfer speeds, and auto MDI/MDI-X
- Supports WAN connection types: DHCP / Static IP / PPPoE/ PPTP / L2TP
- Supports Dynamic DNS and DHCP Server
- Supports Wi-Fi Protected Setup (WPS)
- Advanced security: 64/128-bit WEP, WPA / WPA2 and WPA-PSK / WPA2-PSK (TKIP/AES encryption)
- Supports NAT firewall, Port / URL-based access control and MAC address filtering
- Supports dual Wireless Modes: AP Router and WDS Repeater
- Supports dual-SSID to allow users to access different networks through one single AP
- Supports WMM (Wi-Fi Multimedia) and wireless QoS to enhance the efficiency of multimedia application
- Supports 5-level Transmitting Power Control to adapt various environments (100%, 70%, 50%, 35%, 15%)
- Supports wireless schedule to automatically enable or disable the wireless function based on predefined schedule
- TX Beamforming technology improves the wireless coverage, throughput and reliability
- System status monitoring includes DHCP Client List and System Log
- Supports IAPP (Inter Access Point Protocol) and, Wireless roaming to enable clients to roam across different wireless networks

- Supports remote software upgrades
- User-friendly configuration program accessed via a web browser
- User-friendly configuration program accessed via Easy Setup program

Specification

Wireless specification	<ul style="list-style-type: none"> • Operating Frequency : 2.412G~2.484GHz • Operating Frequency : 5.1G~5.8GHz • IEEE 802.11b data rates of up to 11 Mbps with automatic fallback to 5.5, 2, and 1 Mbps • IEEE 802.11g data rates of up to 54 Mbps with automatic fallback to 48, 36, 24, 18, 12, 9, and 6 Mbps • IEEE 802.11n (MIMO 2T2R): Up to 300Mbps (MCS15) • IEEE 802.11ac 2T2R: 866Mbps (5GHz) • Security supports 64/128-bits WEP, WPA, WPA2, WPS • Multi-SSID
Ethernet WAN specification	<ul style="list-style-type: none"> • WAN: 10/100/1000Mbps Auto-MDI/MDI-X RJ-45 Ethernet port • WAN IP Assignment <ul style="list-style-type: none"> - Static IP - DHCP client - PPPoE client
LAN specification	<ul style="list-style-type: none"> • LAN: 10/100/1000Mbps Auto-MDI/MDI-X RJ-45 Ethernet port
Features	<ul style="list-style-type: none"> • IGMP snooping and IGMP proxy • VPN pass through • Management - HTTP Web-based Configuration
Hardware interface	<ul style="list-style-type: none"> • DC Power jack • Power switch to power on /off device • Reset button to factory defaults • 1 x Ethernet for WAN port connection • 4 x Ethernet for LAN port connection • 2 x 3dBi fixed dual-band Antenna • WiFi ON/OFF, WPS switch button
Power Supply	<ul style="list-style-type: none"> • External power adapter DC12V 1A
Dimension	<ul style="list-style-type: none"> • L140 x W107 x H29 mm
Environment	<ul style="list-style-type: none"> • Operating temperature: 0 ~ 40°C • Storage temperature: -20 ~ 70°C • Humidity: 20 ~ 95% non-condensing
Certification	<ul style="list-style-type: none"> • CE

Application

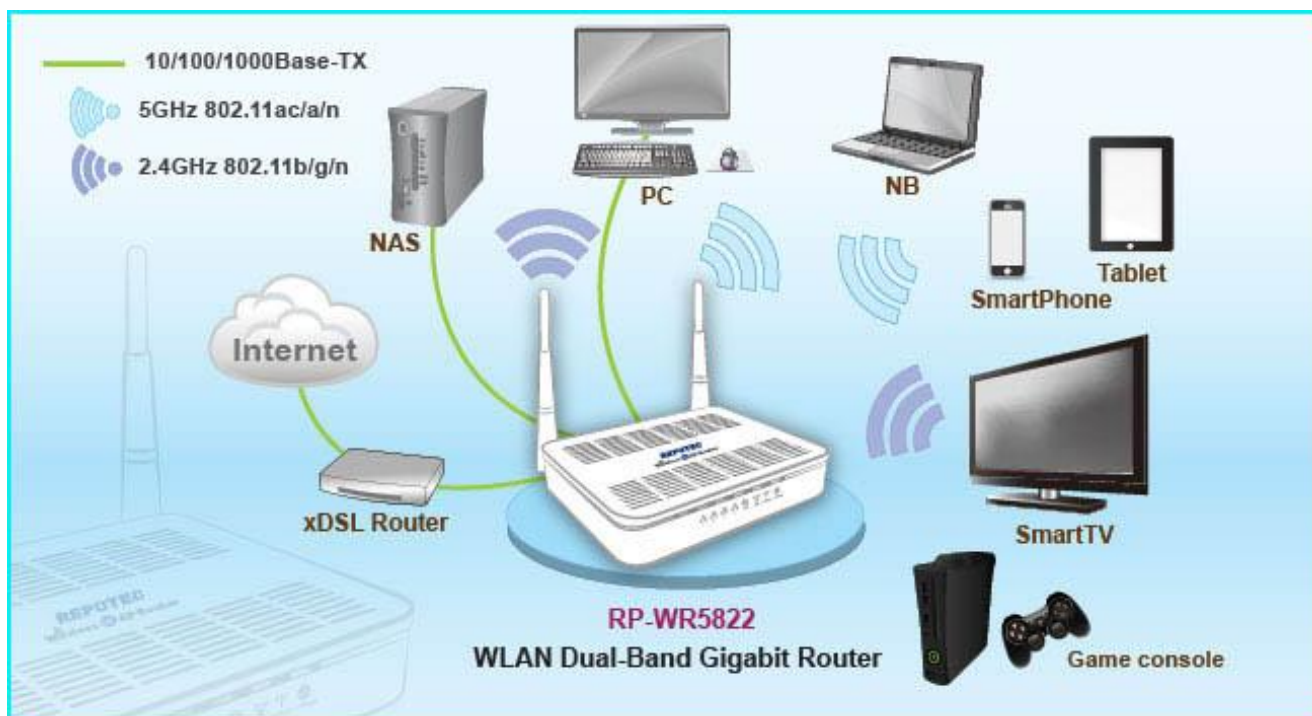

Ordering Information

RP-WR5822 Wireless-ac Dual-Band 4-P Gigabit AP Router, 2T2R

REPOTEC CO., LTD.

3F., No.258, Liancheng Rd., Zhonghe District., New Taipei City 235, Taiwan
TEL: 886-2-8227-1888 FAX: 886-2-8227-1818