

## RP- MCR116 | RP- RPS150 16-Slot Media Converter Rack

RP-MCR116 is a specially designed chassis to accommodate

RP-110TMC/1000SC/1002MG series slide-in converters. A chassis hosts up to 16 pieces of various media converters which can be used standalone or slide into the chassis. All the

converters connected directly to the chassis's power backplane with a redundant power supply. When it contains two power supply units, if one fails, the other power supply starts running to keep the device powered up.

The power adapters are no longer required when managing multiple converters together.




### Feature

- Provides housing for up to 16 media converters
- Front panel LED indications
- Standard 19" rack-mount size, 2U height
- Hot swappable, easy & quick replacement of converters and power supplies
- Provides two cooling fans to ensure good ventilation
- Two redundant power supplies with load-sharing to ensure non-stop reliable operation
- Power isolation design with converter bays: ensures each bay is electrically isolated from each other

## Specification

<b>Slots Number</b>	<ul style="list-style-type: none"> <li>• 16 slots for slide-in converter</li> </ul>
<b>LED Indicator</b>	<ul style="list-style-type: none"> <li>• 2 * Power on, 2 * Power fail, 2 * Fan Fail</li> </ul>
<b>Power Supply</b>	<ul style="list-style-type: none"> <li>• One hot-swappable power supply; optional second power supply for load-sharing, hot-swappable</li> <li>• AC Input 100 to 240 VAC</li> </ul>
<b>Power Overload Protection</b>	<ul style="list-style-type: none"> <li>• All outputs protected from short circuit condition, automatic recovery</li> </ul>
<b>Cooling</b>	<ul style="list-style-type: none"> <li>• Two fans mounted at the rear</li> </ul>
<b>Environment</b>	<ul style="list-style-type: none"> <li>• Operating Temperature: 0°C~40°C</li> <li>• Operating Humidity: 10%~90% (Non-Condensing)</li> </ul>
<b>Dimension</b>	<ul style="list-style-type: none"> <li>• 440 * 88 * 360 mm (including power supply unit)</li> </ul>
<b>Certification</b>	<ul style="list-style-type: none"> <li>• FCC, CE</li> </ul>

## Application

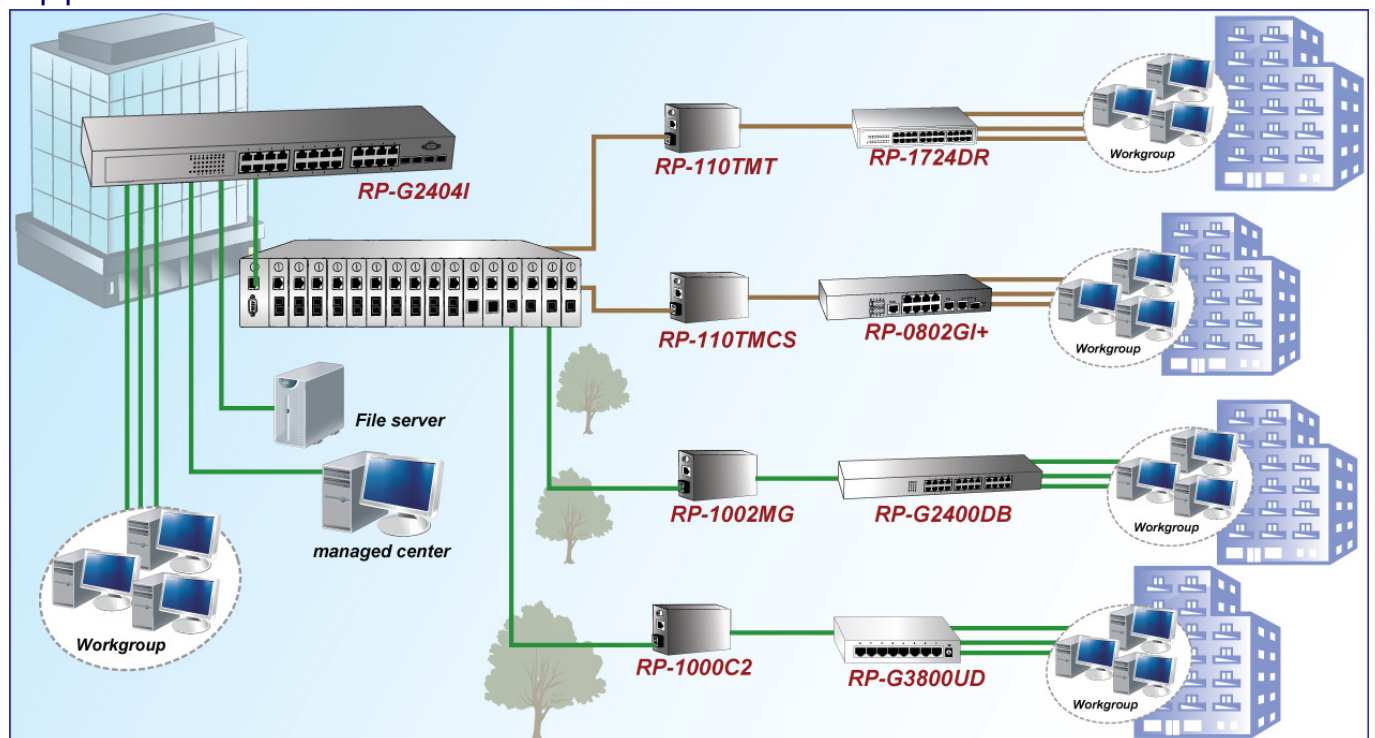

## Ordering information

**RP-MCR116** 16-Slot Media Converter Rack, w/ 1 AC Power Supply

**Optional Power Supply:**

**RP-RPS150** 90-260V/150W AC Redundant Power Supply

**REPOTEC CO., LTD.**

3F., No.258, Liancheng Rd., Zhonghe District., New Taipei City 235, Taiwan

TEL: 886-2-8227-1888 FAX: 886-2-8227-1818